


INSTALLATION

HINT:

- Use the same procedures for the RH side and LH side.
- The procedures listed below are for the LH side.

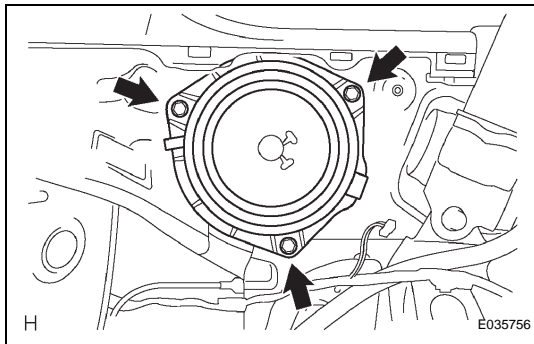

- 1. INSTALL REAR SPEAKER ASSEMBLY**
 - (a) Connect the connector.
 - (b) Install the speaker with the 3 bolts.
- 2. INSTALL DECK TRIM COVER REAR (See page [IR-11](#))**
- 3. INSTALL SPARE WHEEL COVER ASSEMBLY**
- 4. INSTALL BACK DOOR WEATHERSTRIP**
- 5. INSTALL REAR SEAT ASSEMBLY**
 - (a) Rear seat assembly (see page [SE-16](#)).
- 6. INSTALL REAR DOOR OPENING TRIM RH**
- 7. INSTALL REAR DOOR OPENING TRIM LH**
- 8. INSTALL REAR DOOR SCUFF PLATE RH (See page [IR-12](#))**
- 9. INSTALL REAR DOOR SCUFF PLATE LH (See page [IR-12](#))**
- 10. CONNECT CABLE TO NEGATIVE BATTERY TERMINAL**