


FRONT WIPER RUBBER

COMPONENTS

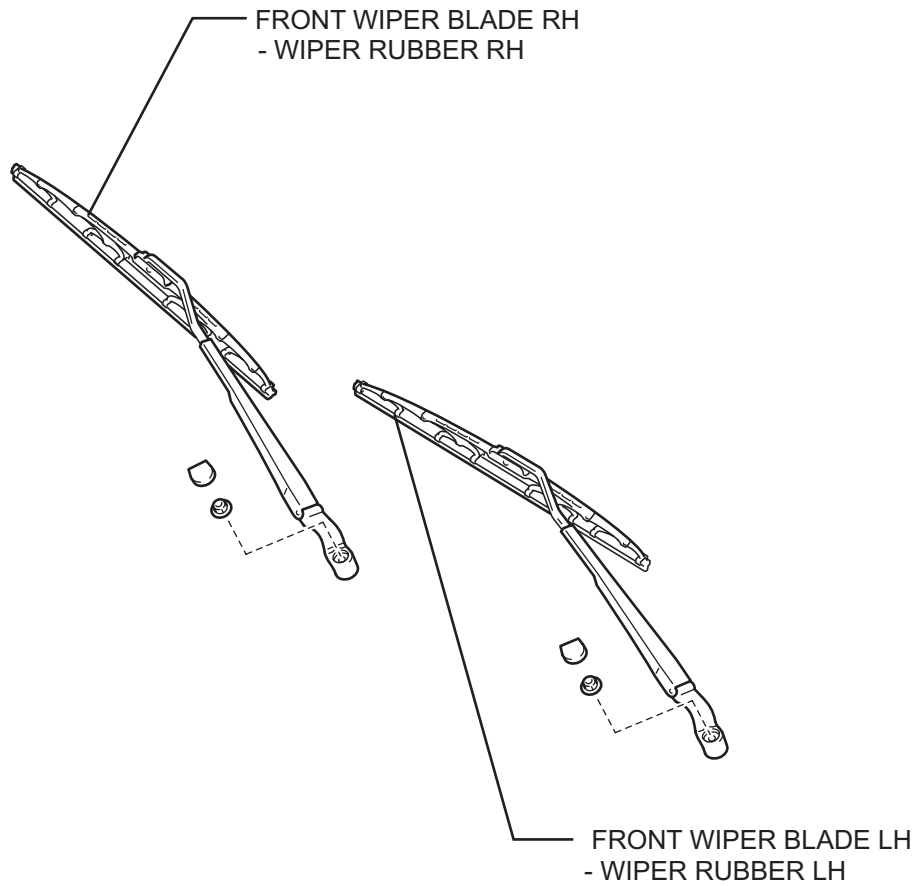

REMOVAL

HINT:

- Use the same procedures for the RH side and LH side.
- The procedures listed below are for the LH side.

1. REMOVE FRONT WIPER BLADE LH

- (a) Remove the wiper blade from the wiper arm.

NOTICE:

Do not fold down the front wiper arm with the front wiper blade being removed from it.

2. REMOVE WIPER RUBBER LH

- (a) Remove the wiper rubber from the wiper blade.
- (b) Remove the 2 wiper rubber backing plates from the wiper rubber.